

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/053914 A1**

- (51) International Patent Classification<sup>7</sup>: **H01J 17/49**
- (21) International Application Number:  
PCT/KR2002/002305
- (22) International Filing Date: 7 December 2002 (07.12.2002)
- (25) Filing Language: Korean
- (26) Publication Language: English
- (30) Priority Data:  
10-2002-0077251  
6 December 2002 (06.12.2002) KR
- (71) Applicant (for all designated States except US): **LG MICRON LTD.** [KR/KR]; Head Office/Plant 2, 624 Gupo-dong, Gumi-city, 730-400 Gyeongsang buk-do (KR).
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **CHO, Won-Duk** [KR/KR]; Head Office/Plant 2, 624 Gupo-dong, Gumi-city, 730-400 Gyeongsang buk-do (KR).
- (74) Agent: **KIM, Young-Chul**; #303 New Seoul Building, 828-8 Yoksam-dong, Kangnam-ku, 135-080 Seoul (KR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REAR PLATE FOR PLASMA DISPLAY PANEL

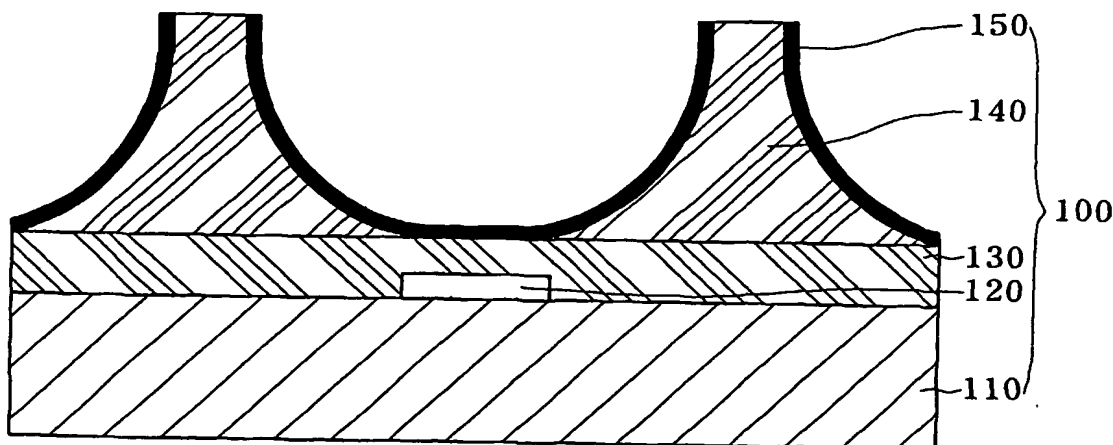

(57) Abstract: Disclosed is a rear plate of a plasma display panel. In the rear plate, barrier ribs are formed through etching after backing, and thus the completed barrier ribs are not deformed. Therefore, each electrode can be exactly located on a central portion between barrier ribs. When a PDP having front and rear plates attached to each other has been completed, optical characteristics of the PDP such as white brightness, color temperature, and contrast, and electric characteristics of the PDP such as voltage margin, power consumption, and electric efficiency, are improved, so that the reliability is improved.